



APPLICATIONS

Specifically designed for the following uses:

- Basement draining
- Water transfer
- Dewatering

SPECIFICATIONS

Pump:

- Discharge: 1¼" NPT, will accept adapter for 1½" discharge pipe.
- Power cord: heavy duty 8 foot, 3-wire cord.
- Temperature: 160°F (71°C) maximum.
- Sump diameter: 12 inches or larger.

Motor:

- ⅓ HP, 115 V, 60 Hz, single phase, 1725 RPM with built-in overload protection and automatic reset.
- 6.0 amps maximum.

FEATURES

■ Top-Side Suction:

Positioning of suction strainer in top of casing eliminates impeller clogging from debris in bottom of sump.


■ Powered for Continuous

Operation: All ratings are within the working limits of the motor.

■ Corrosion Resistant


Construction: Plastic semi-open impeller, strainer, base, casing, brass column pipe, stainless steel shaft.

■ Float Actuated Switch

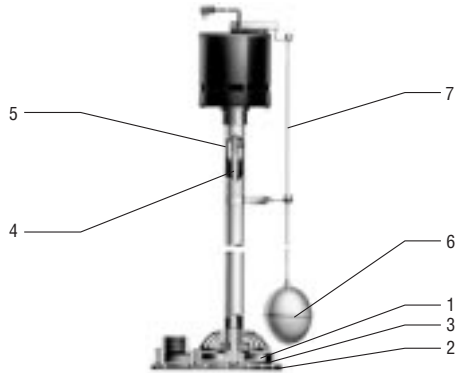


DIMENSIONS AND WEIGHTS

(All dimensions are in inches and weight in lbs. Do not use for construction purposes.)

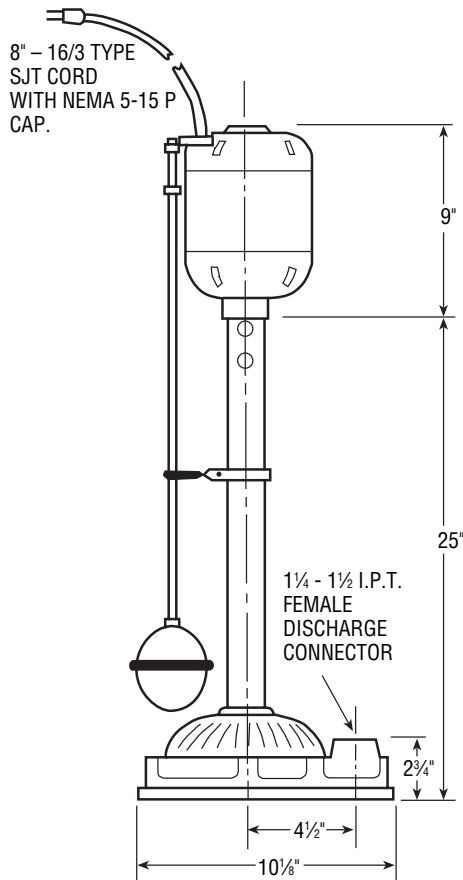

INSTALLATION

PLUG INTO 115 V. 60 CYCLE
20 AMP FUSED CIRCUIT

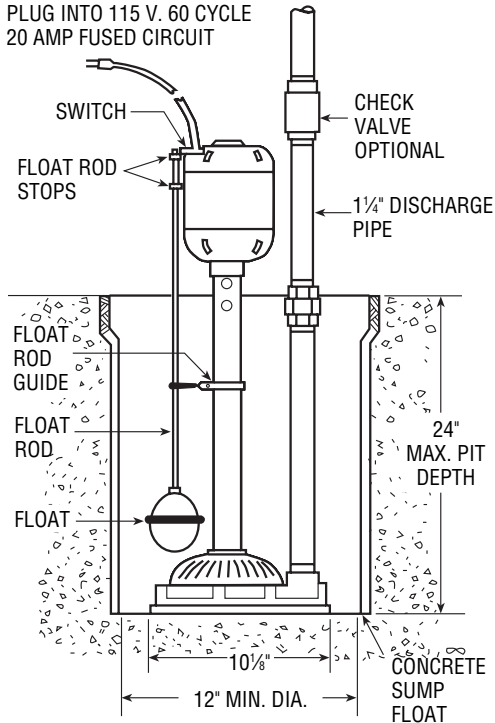

PARTS

Item No.	Description
1	Impeller
2	Base
3	Casing
4	Shaft
5	Coupling
6	Float
7	Float rod

PERFORMANCE RATINGS

Total Head (ft. of water)	Gallons Per Hour
10	2400
15	2000
20	1300
22	960

*Vertical distance or elevation from bottom of sump to highest point in discharge plus pipe friction.

Order No.	HP	Volts	Phase	Max. Amps	RPM	Wt. (lbs.)
DVP03	1/3	115	1	6.0	1750	32