

CURVES
CBG2MK3PH




2MK impact™ Submersible 2" Sewage Pump CURVES
1.8 – 3.8 HP, Three Phase



2MK Impact 3Ø Composite Curve

POWER (ELECTRIC)


ISO-Curves: Overall Efficiency (%)

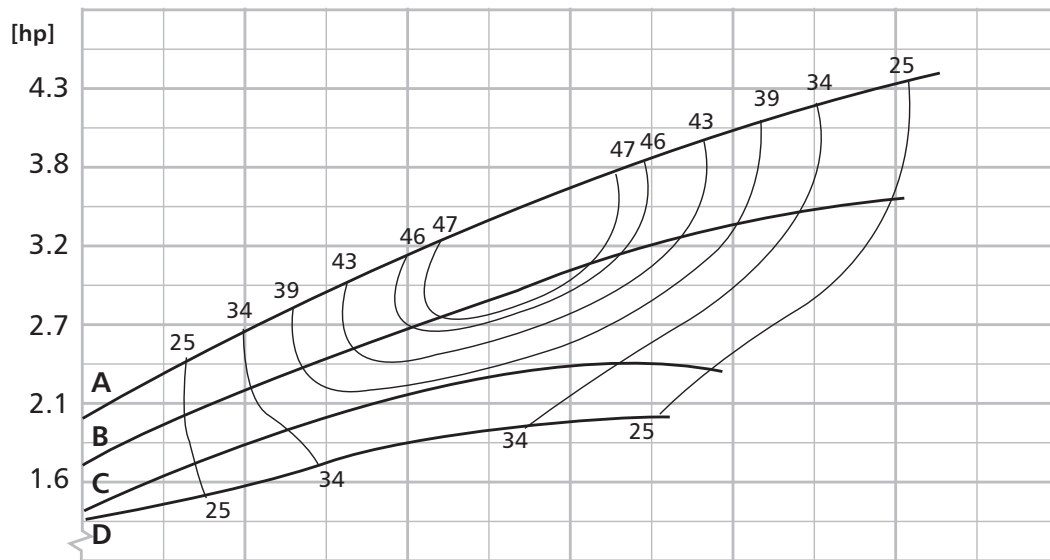

HEAD

ISO-Curves:

(—) Pump Efficiency (%)

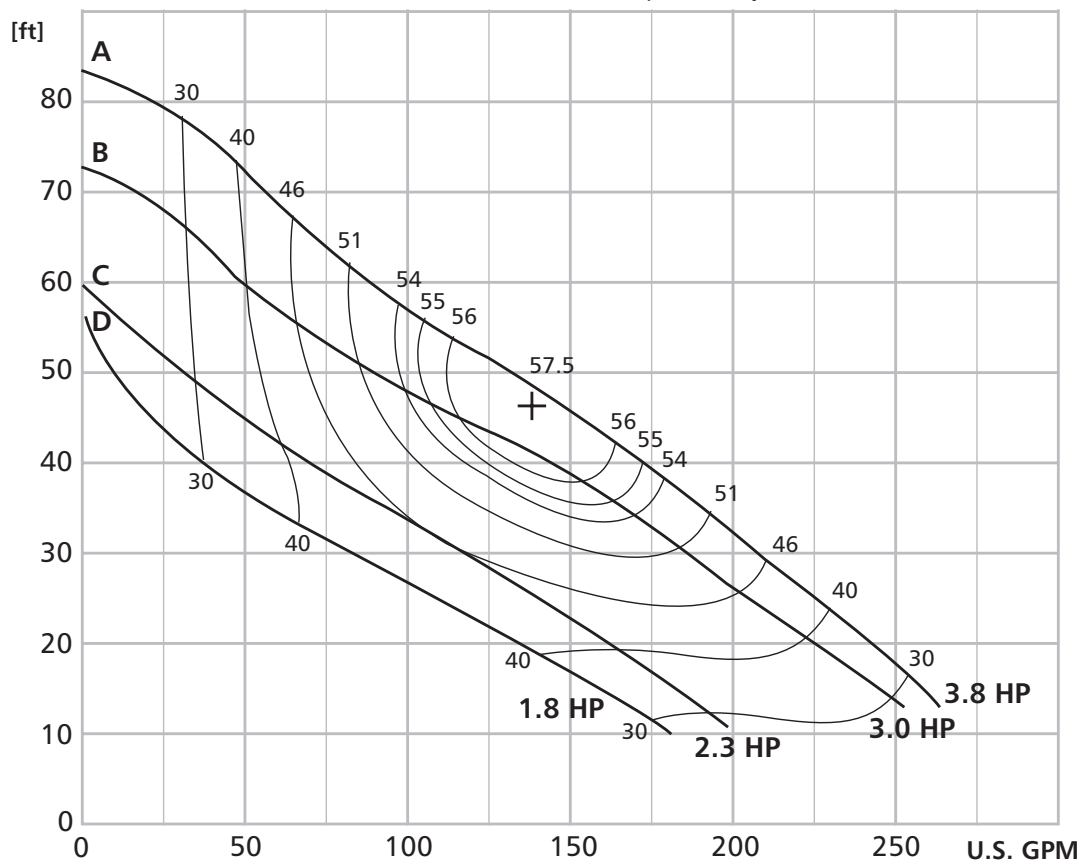


NOTE: Curves show performance with clear cold water.

FLOW


A = 4.41"	C = 3.90"
B = 4.09"	D = 3.70"

2MK Impact 3Ø

POWER

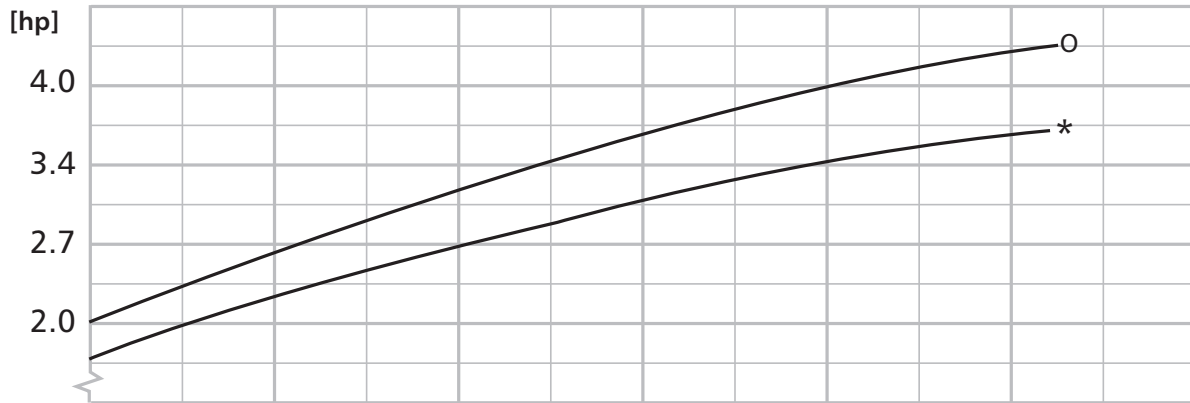

HEAD

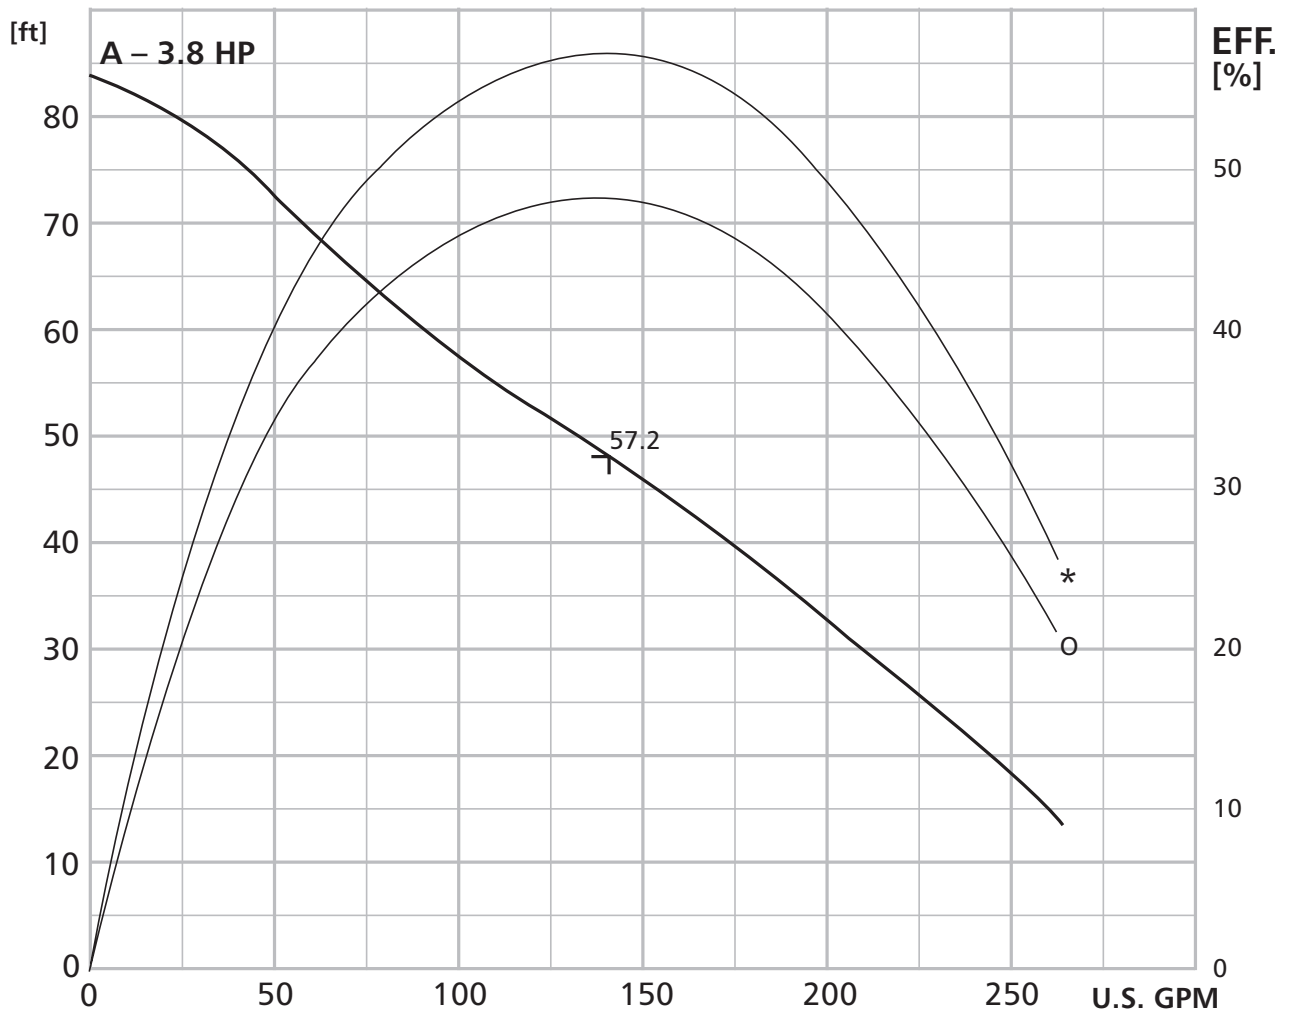

NOTE: Curves show performance with clear cold water.


*: Pump efficiency / shaft power

O: Overall efficiency / input power


FLOW

2MK Impact 3Ø

POWER

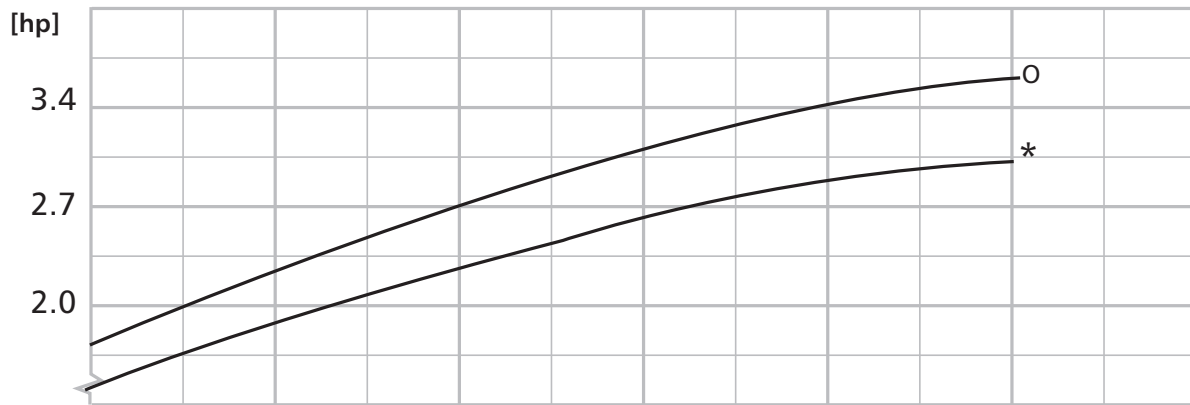

HEAD

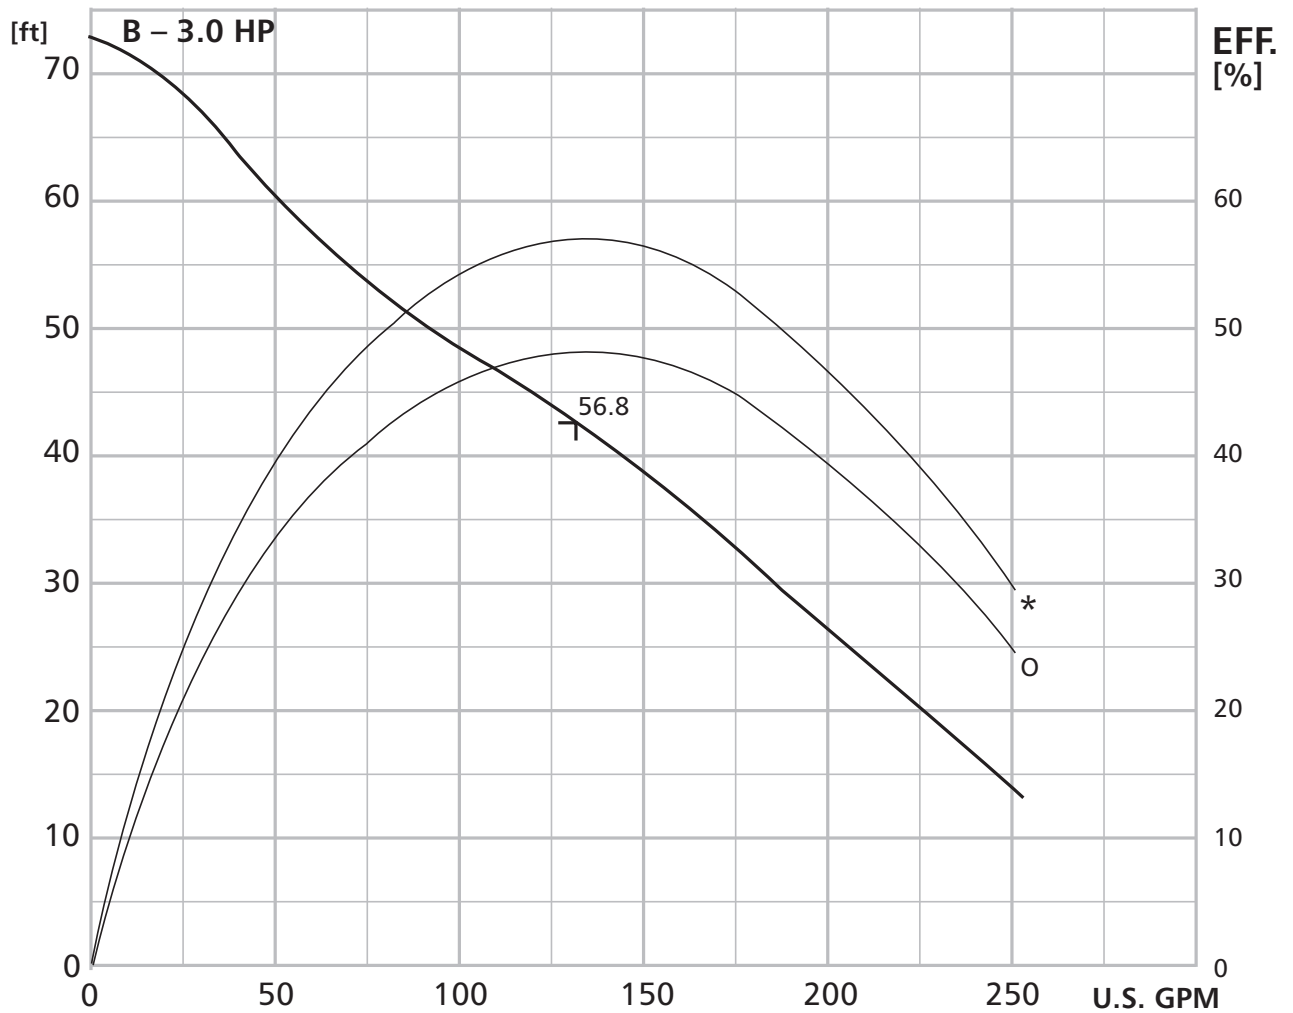

NOTE: Curves show performance with clear cold water.


*: Pump efficiency / shaft power

O: Overall efficiency / input power


FLOW

2MK Impact 3Ø

POWER

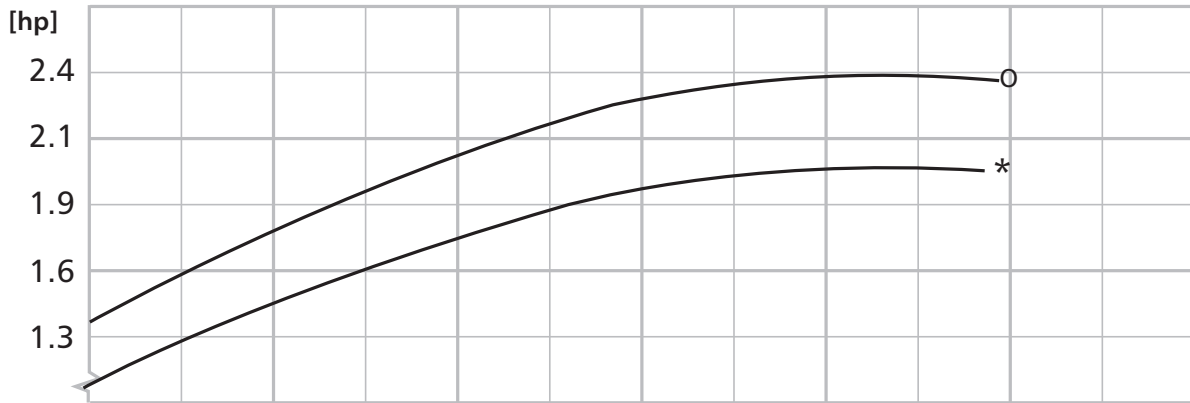

HEAD

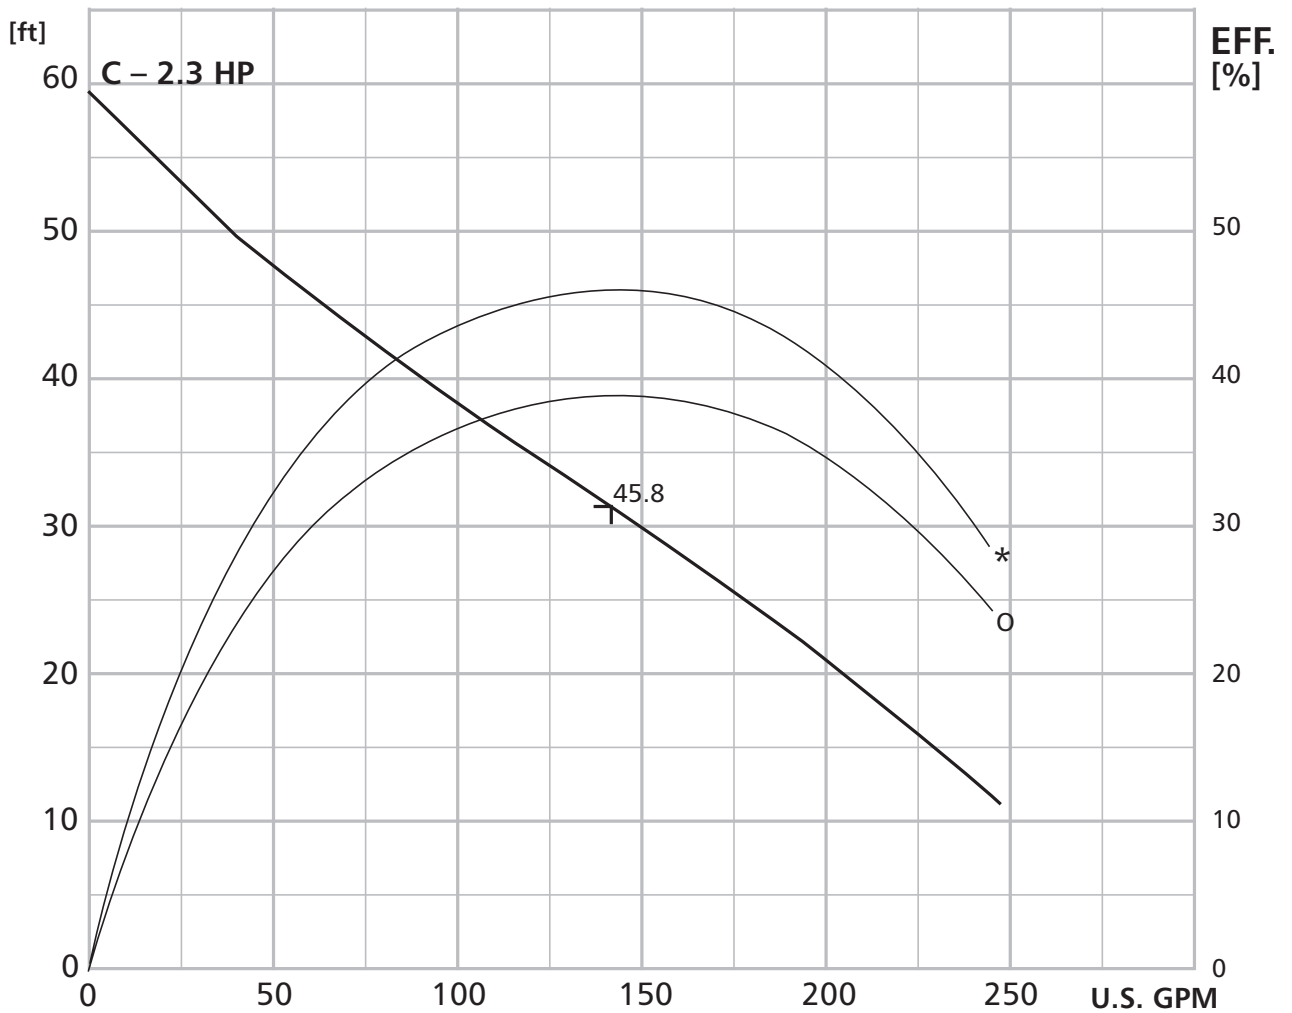

NOTE: Curves show performance with clear cold water.


*: Pump efficiency / shaft power

O: Overall efficiency / input power


FLOW

2MK Impact 3Ø

POWER

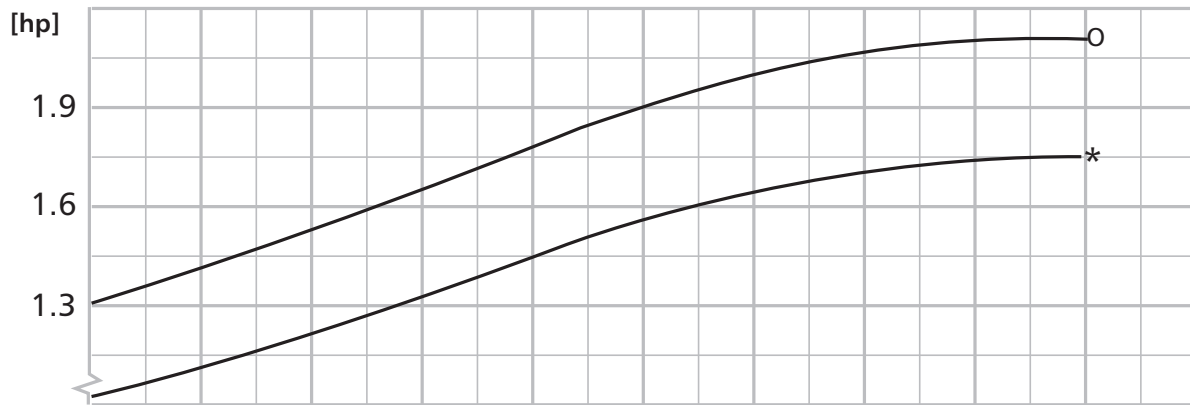

HEAD

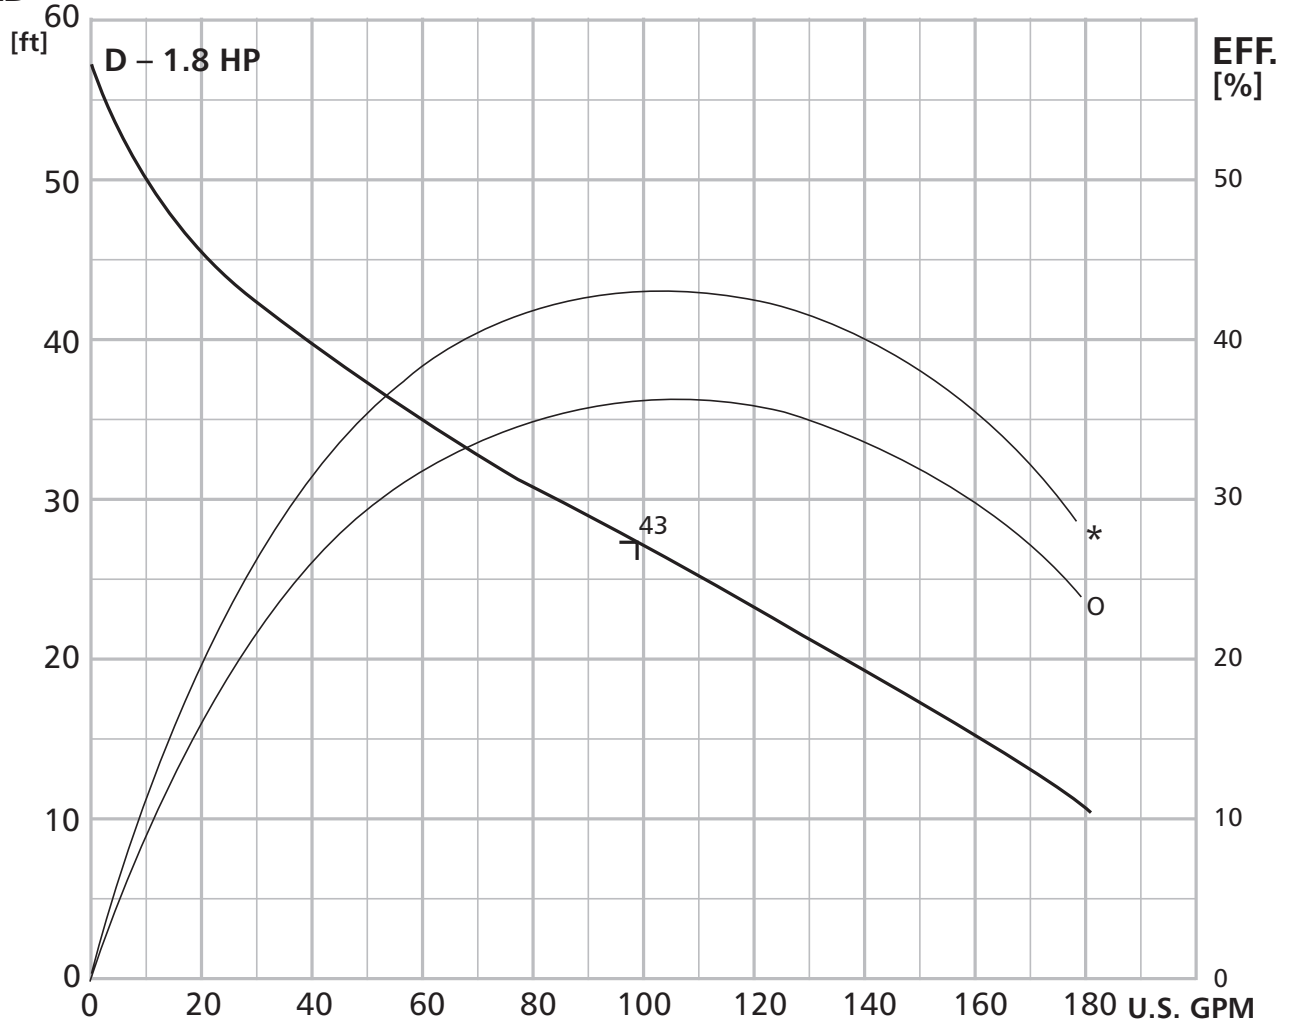

NOTE: Curves show performance with clear cold water.

*: Pump efficiency / shaft power

O: Overall efficiency / input power

FLOW



Bell & Gossett



2881 East Bayard Street, Seneca Falls, NY 13148 • Phone: 866-325-4210 • Fax: 888-322-5877 • www.bellgossett.com

Bell & Gossett is a registered trademark of ITT Corporation.

ITT and the Engineered Blocks Symbol are registered trademarks of ITT Manufacturing Enterprises, Inc.

Copyright © 2011 ITT Corporation

CBG2MK3PH

October, 2011

Printed in U.S.A.

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.